


Application

Matching auxiliary contacts


| Installation type | Product picture | Model | Contact type |
|---------------------------------|-----------------|---------------------------|------------------------------------|
| Front mounted Auxiliary contact | | GVAE1 GVAE11 GVAE20 | 1NO/1NC optional 1NO+1NC 2NO |
| Side mounted Auxiliary contact | | GVAN11 GVAN20 | 1NO+1NC 2NO |



Auxiliary contact

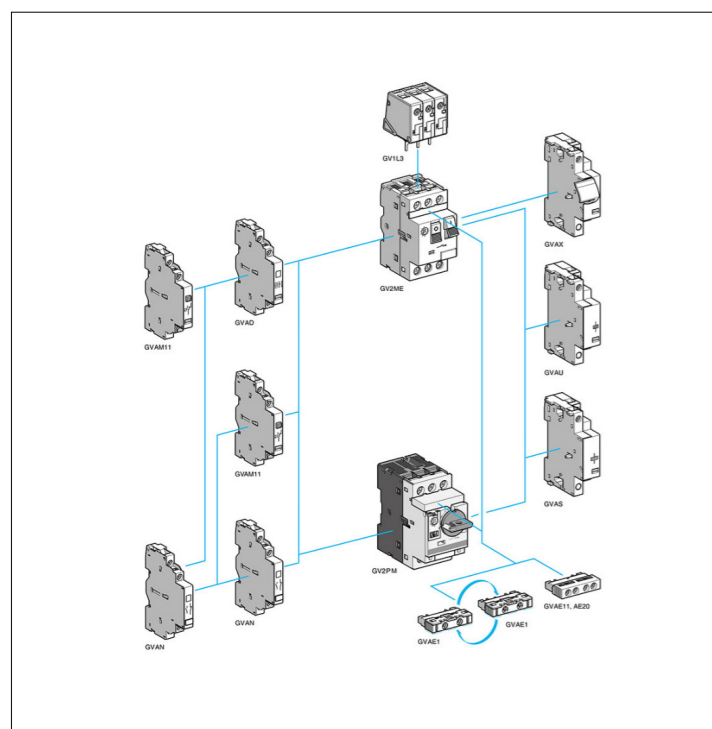

Wiring diagram

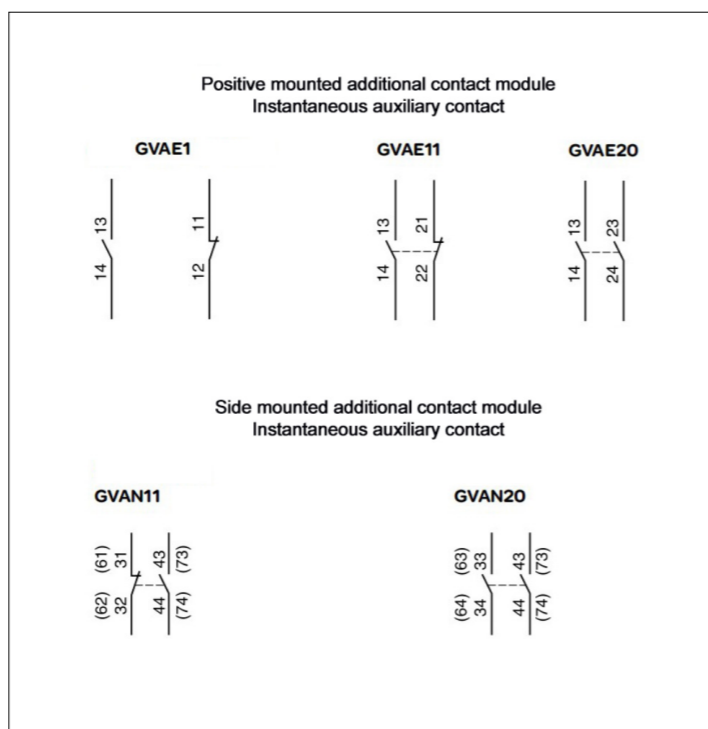

Application

YTTM1 series moulded case circuit breaker is a new type product developed and manufactured by Adopting international advanced technology. It is supplied with rated insulation voltage 660V and used for circuit of AC 50Hz, rated operation voltage AC 400V or below rated operation current up to 125A for infrequent changing over and starting of the motors. Equipped with the protection devices for over-current, short circuit and under voltage, the product is capable of preventing damage of circuits and supply units. The product conforms to IEC60947-2 standard.




Specifications

| Product Model | YTTM1-125 |
|---|--------------------------|
| Pole | 2P |
| Colour | White |
| Rated Current (A) | 32, 40, 63, 80, 100, 125 |
| Rated Working Voltage(V) | 400 |
| Rated Insulated Voltage(V) | 660 |
| Limiting Short Circuit Breaking Capacity(kA) | 25 |
| Operating Short Circuit Breaking Capacity(kA) | 19 |
| Characteristic Curve | C |
| Standard | IEC60947-2 |
| Frequency | 50/60Hz |

Features

1. Small volume
2. High breaking capacity
3. Electric arcing short
4. Anti-vibration

Wiring diagram

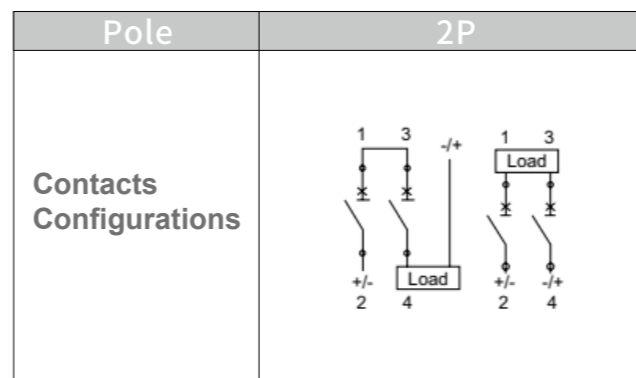

Dimension

